

KONI

®
stertili



ST 4040

Hydraulic 4-Post Vehicle Lifts



ADVANTAGES:

Low drive-on height, thus easy access; also for low profile vehicles. This low drive-on height makes it possible to use "short" drive-on ramps, resulting in a great deal of manoeuvring and parking space in your workshop.

The platforms are level in all locking positions which makes these lifts ideal for wheel-alignment. Besides being level in its lowest position as well, it can also be used for adjusting headlights. In addition, Stertil-Koni builds special alignment versions with integrated sliding plates. The absence of any obstacles, i.e. raised edges, greatly facilitates jobs such as alignment. Carrying a wide range of 4-post vehicle lift models and versions, Stertil-Koni can always offer a solution geared to your specific lifting requirements.

The unique lifting height of over 2 metres, which is reached in the shortest possible time, allows tall mechanics to work under the vehicle standing upright. The lowering speed can be adjusted manually, so that the vehicle can be easily positioned on, for example, axle supports.

Equipped with adjustable ramps, these 4-post lifts can be used for a wide range of vehicles. The adjustable tracks ensure maximum freedom of movement under the vehicle. The Stertil-Koni 4-post vehicle lifts stand out for their reliability, long life and high residual value. This is not surprising, as all models have undergone a 50,000 full-load lifting test during their development and design stages.


Hydraulic 4-Post vehicle lifts

Specifications & Dimensions:

Vehicle lift type: ST 4040
 Lifting system: Hydraulic
 Capacity: 4.000 kg.
 Lifting time: 29 Sec.
 Lifting height: 2,000 mm
 Drive-on height: 130 mm
 Lifting time wheel-free lifting system: 8 Sec.

Options:

- Lighting
- Set of short drive-on/drive-off ramps for positioning in pit
- Set of extra-long drive-on/drive-off ramps
- Jacking beams
- Platform integrated wheel-free lifting system (F)
- Wheel alignment lifts with integrated sliding plates at the back and a recess for turning plates.
- Play detectors
- Extra control panel
- Special RAL colours

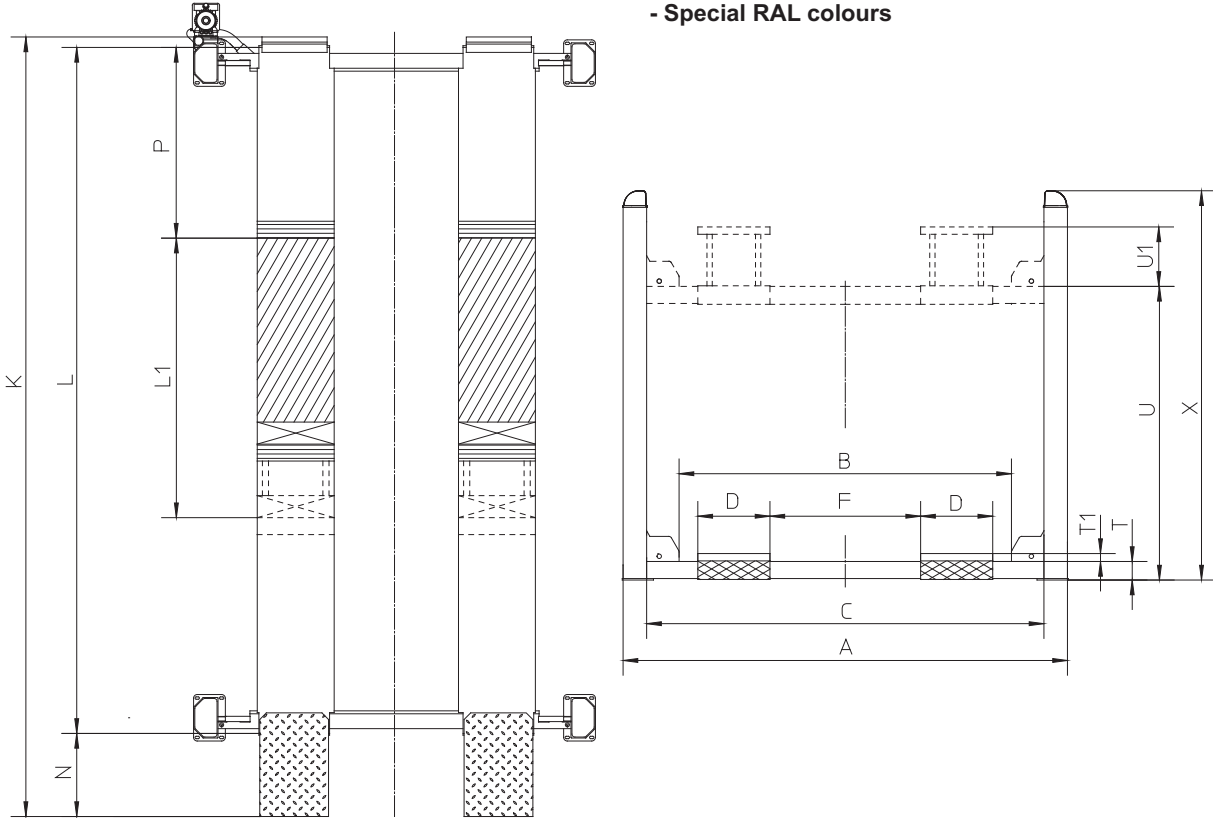

Model	A	B	C	D	F max	K	L	N	T	U	X	Model	L1 max	L1 min	P	T1	U1
ST4040	3030	2255	2700	520	1100	5470	4665	730	130	2000	2650	ST4040F	1900	1400	1300	57	450
ST4040-V	3330	2555	3000	520	1250	5470	4665	730	130	2000	2650	ST4040F-L	1900	1400	1300	57	450
ST4040-L	3030	2255	2700	520	1100	5920	5115	730	130	2000	2650	ST4040F-LV	1900	1400	1300	57	450
ST4040-LV	3330	2555	3000	520	1250	5920	5115	730	130	2000	2650	Additional dimensions for models available with integrated wheel-free lifting system					



Stertil B.V., P.O. Box 23, 9288 ZG Kootstertille (The Netherlands) Tel. +31(0)512 334444 Telefax +31(0)512 334430

E-mail: info@stertil.nl Internet: www.stertil.nl